

LED STREET LIGHT

TECHNICAL SPECIFICATIONS

(Model BKB-M1-50-5000K)



KEY FEATURES:

- ★ 6,000LM Lamp Lumen (Lamp Lumen Efficiency>120LM/W)
- ★ 160LM/W LED Lumen Efficiency, Energy Saving
- ★ 100,000+ Hours Lifespan; Lumen Decrease<3%
- ★ CRI>80, with Excellent Color Rendition
- ★ Die Casting Aluminum Casing with unique design; Perfect Heat Elimination
- ★ IP65 Waterproof Rank and Anti-corrosion Casing with Electrophoretic Surface Treatment Secured Long Lifespan under Severe Environment.
- ★ 5 Years Manufacturer Warranty.



TECHNICAL DATASHEET

Rated Power:	50W	Input Volatage:	AC85-265V
Lamp Lumen:	6,000 LM	Lamp Lumen Eff.:	120LM/W
Woring Frequency:	50~60Hz	Power Factor (PF):	>0.95
Nos of LEDs:	64pcs	Number of Modules:	64LEDsx1 modules
Color Temp:	4500~5500K	CRI (Ra):	>80
IP Rank:	IP65	LED Chips:	>PHILIPS 3030
Environment Temp.:	-30~+60°C	LED Driver:	SOSEN 50W
Lifespan:	100,000 hrs	Warranty:	5 Years

PACKING INFORMATION (1pcs per carton):

Product Size:	L378*W305*H114 mm	Carton Size:	430*340*140mm
Net Weight:	3.5 kgs	Gross Weight:	4.2 kgs
PCS per 20':	1350 CTN	PCS per 40'HQ:	3200 CTN

APPALICATIONS:

- ★ Street/ Road lighting
- ★ Tunnel lighting
- ★ High mast for square & open space lighting
- ★ High/Express Way lighting
- ★ Large park lot lighting

LED STREET LIGHT

TECHNICAL SPECIFICATIONS

(Model BKB-M2-100-5000K)



KEY FEATURES:

- ★ 12,000LM Lamp Lumen (Lamp Lumen Efficiency>120LM/W)
- ★ 160LM/W LED Lumen Efficiency, Energy Saving
- ★ 100,000+ Hours Lifespan; Lumen Decrease<3%
- ★ CRI>80, with Excellent Color Rendition
- ★ Die Casting Aluminum Casing with unique design; Perfect Heat Elimination
- ★ IP65 Waterproof Rank and Anti-corrosion Casing with Electrophoretic Surface Treatment Secured Long Lifespan under Severe Environment.
- ★ 5 Years Manufacturer Warranty.



TECHNICAL DATASHEET

Rated Power:	100W	Input Volatage:	AC85-265V
Lamp Lumen:	12,000 LM	Lamp Lumen Eff.:	120LM/W
Woring Frequency:	50~60Hz	Power Factor (PF):	>0.95
Nos of LEDs:	128pcs	Number of Modules:	64LEDsx2 modules
Color Temp:	4500~5500K	CRI (Ra):	>80
IP Rank:	IP65	LED Chips:	PHILIPS 3030
Environment Temp.:	-30~+60°C	LED Driver:	SOSEN 100W
Lifespan:	100,000 hrs	Warranty:	5 Years

PACKING INFORMATION (1pcs per carton):

Product Size:	L468*W305*H114 mm	Carton Size:	520*340*140mm
Net Weight:	4.5 kgs	Gross Weight:	5.2 kgs
PCS per 20':	1080 CTN	PCS per 40'HQ:	2560 CTN

APPICATIONS:

- ★ Street/ Road lighting
- ★ Tunnel lighting
- ★ High mast for square & open space lighting
- ★ High/Express Way lighting
- ★ Large park lot lighting

LED STREET LIGHT


TECHNICAL SPECIFICATIONS

(Model BKB-M4-200-5000K)



KEY FEATURES:

- ★ 24,000LM Lamp Lumen (Lamp Lumen Efficiency>120LM/W)
- ★ 160LM/W LED Lumen Efficiency, Energy Saving
- ★ 100,000+ Hours Lifespan; Lumen Decrease<3%
- ★ CRI>80, with Excellent Color Rendition
- ★ Die Casting Aluminum Casing with unique design; Perfect Heat Elimination
- ★ IP65 Waterproof Rank and Anti-corrosion Casing with Electrophoretic Surface Treatment Secured Long Lifespan under Severe Environment.
- ★ 5 Years Manufacturer Warranty.

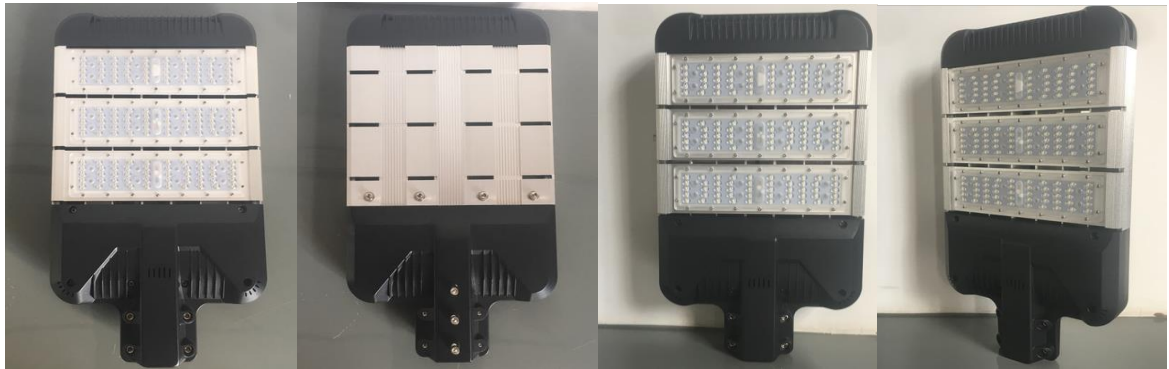

TECHNICAL DATASHEET

Rated Power:	200W	Input Volatage:	AC85-265V
Lamp Lumen:	24,000 LM	Lamp Lumen Eff.:	120LM/W
Woring Frequency:	50~60Hz	Power Factor (PF):	>0.95
Nos of LEDs:	192pcs	Number of Modules:	64LEDsx3 modules
Color Temp:	4500~5500K	CRI (Ra):	>80
IP Rank:	IP65	LED Chips:	PHILIPS 3030
Environment Temp.:	-30~+60°C	LED Driver:	SOSEN 200W
Lifespan:	100,000 hrs	Warranty:	5 Years

PACKING INFORMATION (1pcs per carton):

Product Size:	L548*W305*H114 mm	Carton Size:	600*340*140mm
Net Weight:	5.5 kgs	Gross Weight:	6.2 kgs
PCS per 20':	930 CTN	PCS per 40'HQ:	2200 CTN

APPICATIONS:

- ★ Street/ Road lighting
- ★ Tunnel lighting
- ★ High mast for square & open space lighting
- ★ High/Express Way lighting
- ★ Large park lot lighting